

# PMC-TS1

## High-Accuracy Time Server

### Overview

**PMC-TS1** receives various Global Navigation Satellite System (GNSS) signals and distributes high-accuracy time via IRIG-B, PPS and NTP/SNTP protocols. It is ideal for accurate time synchronization requirements in Electric Power System applications, such as fault detection, sequence of event timestamping, data acquisition and so on.

### Features


- Selectable GNSS (Global Navigation Satellite System) time sources including GPS/Galileo/QZSS
- 2xIRIG-B DC Level Shift signal output with accuracy of <math><150\text{ns}</math> ( $1\sigma$ )
- Optionally GPS PPS (pulse per second) signal output with accuracy of <math><150\text{ns}</math> ( $1\sigma$ )
- 1xRS-485 and 1x10/100BaseT Ethernet port for communications
- 1xForm C Mechanical Relay for power outage alarm
- Supporting SNTPv2 via Ethernet network, servicing 400 SNTP requests per second
- Maintaining accuracy of 55us after 1 hour at constant temperature with standard Temperature Compensated Crystal Oscillator (TCXO) holdover
- Supporting multi-constellation to allow accurate navigation in harsh environments

### Typical Applications

Various applications where time synchronization is essential for:



- Real-time Data Acquisition
- Real-time Control Process
- Fault Analysis and Location
- Tariff Billing

Applicable to EMS, PQMS, SCADA, Real-time monitoring and control system, security and surveillance system

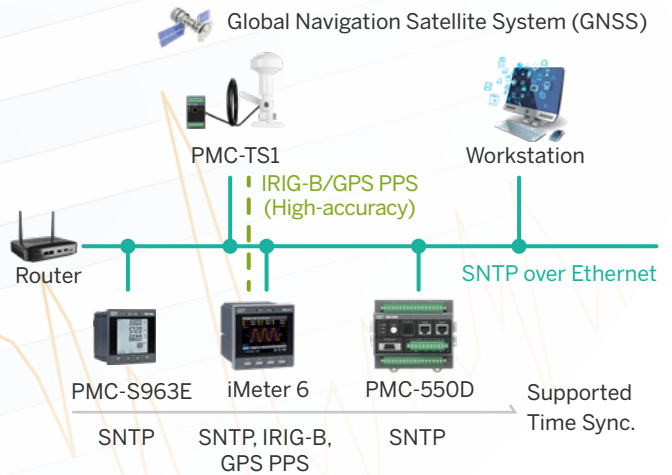

### Device View and Dimensions

Unit: mm

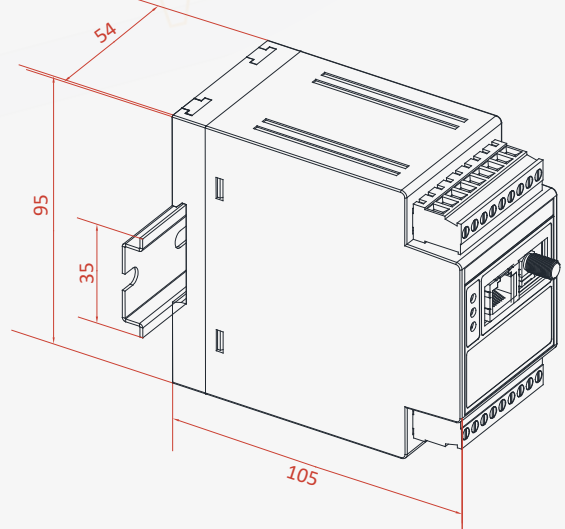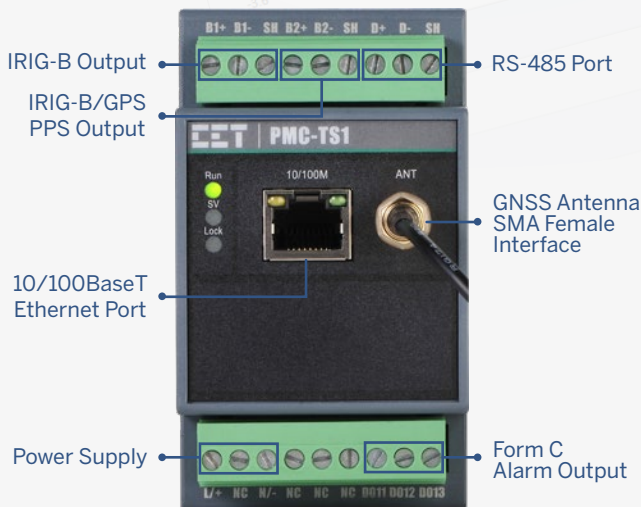

# Technical Specifications

Power Supply (L/+, N/-)	
Standard	95-250VAC/DC ±10%, 47-440Hz
Burden	<4W

IRIG-B Output 1/2 (B1+, B1-, B2+, B2-)	
Accuracy (to UTC)	<150ns (1σ)
Signal Type	DC Level Shift, Unmodulated
Protocol	IEEE 1344

Optional GPS PPS Output (B2+, B2-)	
Accuracy	<150ns (1σ) to UTC

TCXO	
Time-keeping Accuracy (at constant temperature)	55us in 1 hour and 1ms in 24 hours after disconnecting from Satellite
Reception Capability	GPS L1C/A, Galileo E1 C/A, QZSS L1 C/A
Concurrent Reception	Max. 33 tracking channels

Sensitivity	Acquisition Period	>-147dBm
	Reacquisition Period	>-154dBm
	Tracking Period	>-162dBm
Acquisition Time	Cold Start (first-connect)	5 minutes
	Warm Start (reconnect)	2 minutes (with saved ephemeris data)

GNSS Antenna (SMA Male Connector)	
IP Protection	IP67
Polarization	RHCP (Right Hand Circular Polarization)
Antenna Gain	> 4dBi (at 90° elev. angle) > -2dBi (at 10° elev. angle)
Output Impedance	50Ω
Preamp Gain	28±3dB (Magnetic Antenna) 35±2dB (Ceramics Antenna)
Preamp Noise Figure	≤1.5dB
VSWR	≤2.0
Supply Voltage	3.5VDC
Power Consumption	20mA max.

SNTP	
Accuracy (to UTC)	0.5-2 ms
Version	SNTPv2

Alarm Output (DO11, DO12, DO13)	
Type	Form C Mechanical Relay
Loading	5A @ 250VAC or 24VDC

Environmental Conditions	
Operating Temperature	-25°C to +70°C
Storage Temperature	-40°C to +85°C
Humidity	5% to 95% non-condensing
Atmospheric Pressure	70kPa to 106kPa
Pollution Degree	2

Mechanical Characteristics	
Unit Dimensions	54x97.2x111.8 mm
Shipping Weight	TBD
Shipping Dimensions	TBD
Mounting	DIN-Rail Mounting
IP Rating	IP51

# Standards of Compliance

Safety Requirements	
CE LVD 2014/35/EU	EN 61010-1: 2010 +A1: 2019 EN 61010-2-030: 2010
Electrical Safety in Low Voltage Distribution Systems up to 1000Vac and 1500 Vdc	IEC 61557-12: 2018 (PMD)
Insulation	IEC 62052-31: 2015
AC Voltage Impulse Voltage	3kV @1 min 6kV, 1.2 /50μs

# EMC Compatibility

EMC 2014/30/EU (EN 61326: 2013)

Immunity Tests	
Electrostatic Discharge	EN 61000-4-2: 2009
Radiated Fields	EN 61000-4-3: 2006 +A1: 2008 +A2: 2010
Fast Transients	EN 61000-4-4: 2012
Surges	EN 61000-4-5: 2014 +A1: 2017
Conducted Disturbances	EN 61000-4-6: 2014
Magnetic Fields	EN 61000-4-8: 2010
Voltage Dips and Interruptions	EN 61000-4-11: 2004 +A1: 2017
Ring Waves	EN 61000-4-12: 2017

Mechanical Tests	
Spring Hammer Test	IEC 62052-31: 2015
Vibration Test	IEC 62052-11: 2020
Shock Test	IEC 62052-11: 2020

# Ordering Information

Product Code	Description
PMC-TS1 Time Server	
Signal Output	2 2xIRIG-B Output (DCLS) or 1xIRIG-B (DCLS) +1xGPS PPS Output
Power Supply	2 95V-250VAC/DC ±10%, 47-440Hz
System Frequency	5 50Hz/60Hz
Communications	E 1xRS-485 +1x10/100BaseT Ethernet Port
Time Keeping Accuracy	A < 55us in 1 hour after disconnecting from Satellite
PMC-TS1	- 2 2 5 E A PMC-TS1-225EA (Standard Model)

\* It is highly recommended to select a Multi-GNSS Antenna from the "Antenna" table to match the PMC-TS1 for a better performance. The selectable Antennas can receive signals from GPS/Galileo/QZSS constellation with a high gain at over 28dB. If the user plans to use other GNSS Antennas, please contact CET for detailed Antenna Requirements.


# Accessories

Model #	Specification/Description
STA-67301	SMA Male Connector and Mounting Bracket
STA-67302	
STA-67303	
STA-67304	
STA-67305	
STA-67306	
DD100005996	Magnetic Antenna with 3m Cable
DD6002357	Magnetic Antenna with 10m Cable

Email: [sales@cet-global.com](mailto:sales@cet-global.com)  
Website: [www.cet-global.com](http://www.cet-global.com)

Copyright © CET Inc. All rights reserved.

Your Local Representative

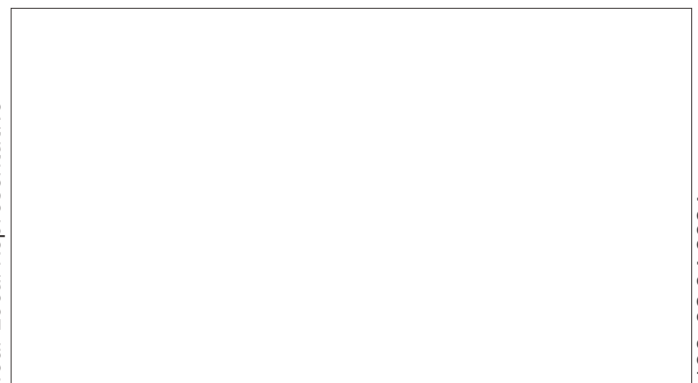

V.00 08.04.2024