



# PMC-340-A6

## Digital Three-Phase Energy Meter

# Digital Three-Phase Energy Meter

## Overview

**PMC-340-A6** Digital Three-Phase Energy Meter is CET's latest offer for the low voltage power/energy metering market featuring DIN-Rail mount, high accuracy, multifunction true RMS measurements and a large, easy to read LCD display. The PMC-340-A6 complies with the IEC 62053-21: 2020 & AS 62053.21: 2023 Class 0.5 and EN 50470-3: 2022 Class C for 100A Direct Connected Input and IEC 62053-22: 2020 & AS 62053.22: 2023 Class 0.5S and EN 50470-3: 2022 Class C for CT Input. The PMC-340-A6 comes standard with a LED as well as a Solid State Pulse Output for energy pulsing. The Meter provides 16MB on-board non-volatile memory for Data Recording and 1xDigital Input for status monitoring and pulse counting for collecting WAGES (Water, Air, Gas, Electric and Steam) information. The standard RS-485 port and Modbus protocol support allows the PMC-340-A6 to become a vital component of an intelligent, multifunction monitoring solution for any Power and Energy Management Systems.

## Typical Applications

- DIN-Rail mount energy metering
- Industrial, Commercial and Utility Substation Metering
- Building, Factory and Process Automation
- Sub-metering and Cost Allocation
- NMI/MID compliant Energy Management

## Features Summary

### Ease of use

- Large, easy to read LCD for both data viewing and configuration
- Two LED indicators for Energy Pulsing and communication activities
- Password protected setup via Front Panel or free software
- Easy installation with DIN-Rail mounting, no tools required
- Direct Connected Input up to 100A without external CT

### Basic Measurements

- Multifunction True RMS measurements
  - ULN, ULL, I, Phase Angle, In (calculated), P, Q, S, PF, Freq.
  - Per-phase and Total kWh/kvarh Imp./Exp./Tot./Net and kVAh, 4-Quadrant kvarh as well as kWh/kvarh Imp./Exp. and kVAh per Tariff
  - Voltage and Current THD, TOHD, TEHD, Individual Harmonics up to 31<sup>st</sup> and Unbalance
  - Current K-Factor, Crest Factor, TDD, TDD Odd and TDD Even
  - Demand and Max. Demand for I, P, Q, S, ULN, ULL and Temperature 1x
  - Temperature and Operating Time
- Max./Min. Log
- 12 monthly recording of kWh/kvarh Imp./Exp./Tot./Net, kVAh and kvarh Q1-Q4 as well as kWh/kvarh Imp./Exp. and kVAh per Tariff
- Two TOU schedules, each providing
  - 12 Seasons
  - 20 Daily Profiles, each with 14 Periods
  - 90 Holidays or Alternate Days
  - 5 Tariffs, each providing the following information
    - kWh/kvarh Import/Export, kVAh
    - P/Q/S Max. Demand

### SOE Log

- 128 events time-stamped to  $\pm 1$ ms resolution

### Setpoint

- 20 user-programmable Setpoints with extensive list of monitoring parameters including Voltage, Current, Power, Temperature and DI Status, etc.
- Configurable thresholds and time delay

### Pulse Outputs

- 1 Front Panel LED and 1 Solid State Pulse Output for energy pulsing application

### Tamper Detection and Alarm

- DI connected to external switch as Setpoint Parameter for Tamper Alarm
- Built-in sensors for Magnetic Tamper Detection
- Alarm Events are stored in SOE Log

### Digital Input

- 1 channel for external status monitoring or pulse counting
- Self-excited, internally wetted

### Data Recorder

- Two Data Recorder Log of Max. 16 parameters
- Recording Interval from 1 second to 40 days
- Configurable Recording Depth (Max. 65535) and Recording offset
- Capable of recording 16 parameters at 5-min interval for over 7 months
- Available parameters: U, I, P, Q, S, PF, Freq., Temperature, kWh Imp./Exp., kvarh Imp./Exp., Demands and Max. Demands for U, I, P/Q/S Total and DI Pulse Counter, etc.

### Communications

- Optically isolated RS-485 port, baud rate from 1,200 to 38,400 bps
- Modbus RTU protocol

### Security

- Programmable Password protection for configurations on Front Panel
- 3-level independent security Comm. password protection and different access permissions


### Real-Time Clock

- Battery backed RTC @ 6ppm ( $\leq 0.5$ s/day)

### System Integration

- Supported by our PecStar® iEMS and free configuration software
- Easy integration into other Automation or SCADA systems via Modbus RTU protocol
- Compatible with MV-90™

## Appearance and Terminals

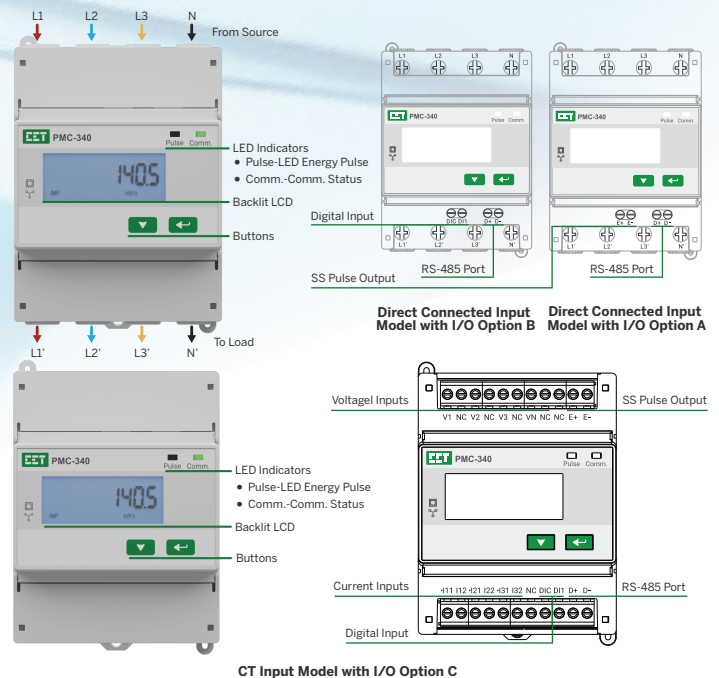

## Technical Specifications

Inputs (L1, L2, L3, N)				
Voltage (Un)	110VAC	220VAC	230VAC	240VAC
Overrange (%Un)	250%	125%	120%	115%
Range (V)	88-276VAC (Self-powered)			
Burden	<2VA/phase			
Direct Input				
Current (In/Imax)	10A/100A			
Range	0.4% In to Imax			
Starting Current (Ist)	0.4% In (40mA)			
Minimum Current (Imin)	5% In (0.5A) for IEC/AS compliant 0.3A for MID compliant			
Burden	<0.2VA/phase			
CT Input				
Current (In/Imax)	1A/10A			
Range	0.1% In to Imax			
Starting Current (Ist)	0.1% In (1mA)			
Minimum Current (Imin)	1% In (0.01A)			
Burden	<0.2VA/phase			
Frequency	45Hz-65Hz			
Solid State Energy Pulse Output (Selectable - kWh/kvarh)				
Isolation	Optical			
Max. Load Voltage	80VDC			
Max. Forward Current	10mA			
Pulse Width	30-500ms configurable			
Pulse Constant	1-999 999 configurable			
Direct Connected Input	500 imp./kWh (default)			
CT Input	10000 imp./kWh (default for General/NMI Version) 5000 imp./kWh (default for MID Version)			
Communications				
RS-485	Modbus RTU			
Baud Rate	1.2/2.4/4.8/9.6/19.2/38.4 kbps			
Terminal Size				
Direct Connected Input	2.0 x 2.5 mm			
CT Input	2.5 x 2.8 mm			
Maximum Wire Size				
Direct Connected Input	0.2-1.2mm <sup>2</sup> (16-30AWG)			
CT Input	0.2-3.5mm <sup>2</sup> (12-30AWG)			
Tightening Torque				
Direct Connected Input	3 kgf.cm/M3/2.66 lb-in/0.3 N.m			
CT Input	2.7 kgf.cm/M2.5/2.39 lb-in/0.27 N.m			
Maximum Torque				
Direct Connected Input	4.5 kgf.cm/M3/3.9 lb-in/0.44 N.m			
CT Input	4.5 kgf.cm/M2.5/3.9 lb-in/0.44 N.m			
Environmental Conditions				
Specified Operating Temp.	-25°C to +55°C			
Limit Operating Temp.	-25°C to +70°C			
Storage/Transport Temp.	-40°C to +85°C			
Humidity	5% to 95% non-condensing			
Atmospheric Pressure	70kPa to 106kPa			
Pollution Degree	2			
Utilization Category	UC3			
Mechanical Characteristics				
Mounting	DIN Rail			
Weight	0.54Kg			
Unit Dimensions	72 (W) x 95 (H) x 70 (D) mm			
Shipping Dimensions	17 x 14 x 11 cm			
IP Rating	51 (Front), 30 (Body)			

## Standards of Compliance

Safety Requirements	
CE LVD 2014/35/EU	EN 61010-1: 2010 + A1: 2019 EN 61010-2-030: 2021 + A1: 2021
Electrical Safety in Low Voltage Distribution Systems up to 1000Vac and 1500 Vdc	IEC 61557-12: 2021 (PMD)
Products Safety Requirements and Tests	IEC 62052-31: 2015 AS 62052.31: 2017 + A1:2021 EN 62052-31: 2016
NMI AC Voltage Impulse Voltage	M13-1 4kV @ 1 minute 6kV, 1.2/50µs

## EMC Compatibility

EMC 2014/30/EU (EN IEC 61326: 2021)

Immunity Tests	
Electrostatic Discharge	EN 61000-4-2: 2009
Radiated Fields	EN IEC 61000-4-3: 2020
Fast Transients	EN 61000-4-4: 2012
Surges	EN 61000-4-5: 2014 + A1: 2017
Conducted Disturbances	EN 61000-4-6: 2014
Magnetic Fields	EN 61000-4-8: 2010
Voltage Dips and Interruptions	EN IEC 61000-4-11: 2020
Ring Wave	EN 61000-4-12: 2017
Immunity Standard for Industrial Environments	EN IEC 61000-6-2: 2019

Emission Tests	
Limits and Methods of Measurement of Electromagnetic Disturbance Characteristics of Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment	EN 55011: 2016 + A1: 2017 + A1: 2020 + A2: 2021
Electromagnetic Compatibility of Multimedia Equipment - Emission Requirements	EN 55032:2015 + A1: 2020 + A1: 2020
Limits for Harmonic Current Emissions for Equipment with Rated Current ≤16A	EN IEC 61000-3-2: 2019 + A1: 2021
Limitation of Voltage Fluctuations and Flicker in Low-Voltage Supply Systems for Equipment with Rated Current ≤16A	EN 61000-3-3: 2013 + A1: 2019 + A2: 2021
Emission Standard for Industrial Environments	EN IEC 61000-6-4: 2019

Mechanical Tests	
Spring Hammer Test	EN 62052-31: 2016 & AS 62052.31: 2017 + A1:2021
Vibration Test	EN IEC 62052-11: 2021 + A11 & AS 62052.11: 2023
Shock Test	EN IEC 62052-11: 2021 + A11 & AS 62052.11: 2023

Revenue Metering Approval	
NMI M13-1 of Australia	Approval Mark: NMI 14/2/127
MID Directive 2014/32/EU	Cert. No.: M4 69268469 0001 (Direct Connected) M4 69268470 0001 (CT Input)

# Accuracy

Parameters	Accuracy	Resolution
Voltage	±0.2%	0.01V
Current	±0.2%	0.001A
P, Q, S	±0.5%	0.001W/var/VA
kWh, kVAh	Direct Connected Input	CT Input
	IEC 62053-21: 2020 & AS 62053.21: 2023 Class 0.5 & EN 50470-3: 2022 Class C	IEC 62053-22: 2020 & AS 62053.22: 2023 Class 0.5S & EN 50470-3: 2022 Class C
kvarh	IEC 62053-24: 2020 Class 1	
PF	±0.5%	0.001
Frequency	±0.02Hz	0.01Hz
In (Cal.)	±1.0%	0.001A
THD	IEC 61000-4-7 Class II	
Temperature	±1°C	0.1°C

**Notes:**


- For the PMC-340-A6 device, the default resolution for both real-time energy values and recorded energy values is 0.1 kWh (MID Certified), with a scale of x0.1. To meet the diverse needs of international customers, during the order-placing stage, customers can specify the factory - configured Energy Resolution to be either 0.01 kWh or 0.001 kWh (Australian NMI Approval). Correspondingly, the Scale of Energy Registers will change to x0.01 or x0.001 respectively.
- It should be noted that the Energy Resolution can only be set during the factory production process. Both real-time energy values and recorded energy values will be accumulated and recorded in accordance with this setting, and no modification can be made thereafter.

# Ordering Information


Product Code	Description
PMC-340 Digital Three-Phase Energy Meter	
Basic Function	A6 3-Phase Metering, Bi-directional Energy, Demands and Max. Demands, Max.&Min., Monthly Energy Log, Multi-Tariff TOU, Setpoint, SOE Log, Data Recorder Log, 16MB Log Memory
Display	L 7-segment Backlit LCD Display
Input Current~	A 10A (100A), Direct Connected Input
	B 1A (10A), CT Input
Input Voltage	3 110-240VLN/190-415VLL (-20% to +15%)
System Frequency	5 45-65Hz
I/O~	A 1xSS Pulse Output
	B 1xDI
	C 1xSS Pulse Output + 1xDI
Communications	A 1xRS-485 Port
Protocol	M Modbus
Display Language	E English
PMC-340 - A6 L A 3 5 A A M E	PMC-340-A6LA35AAME (Standard Model)

~ Device with Input Current "A" can work with I/O option "A" or "B".  
 Device with Input Current "B" is only available with I/O option "C".

# Dimensions and Installation

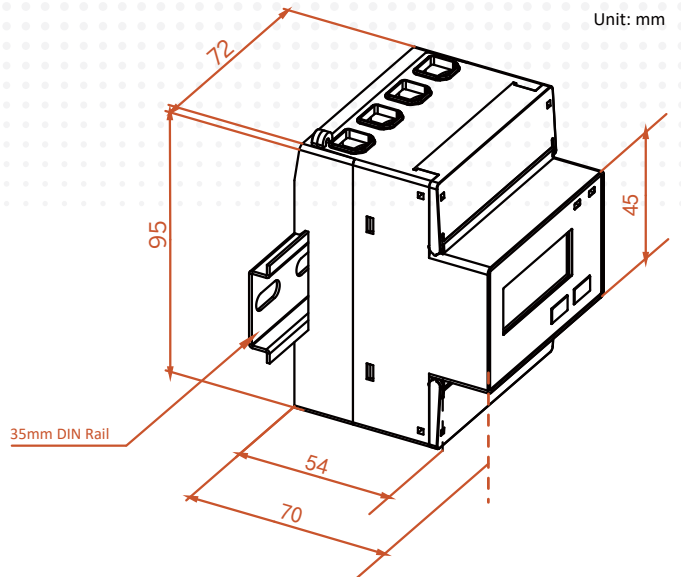

**Direct Connected Input Model**

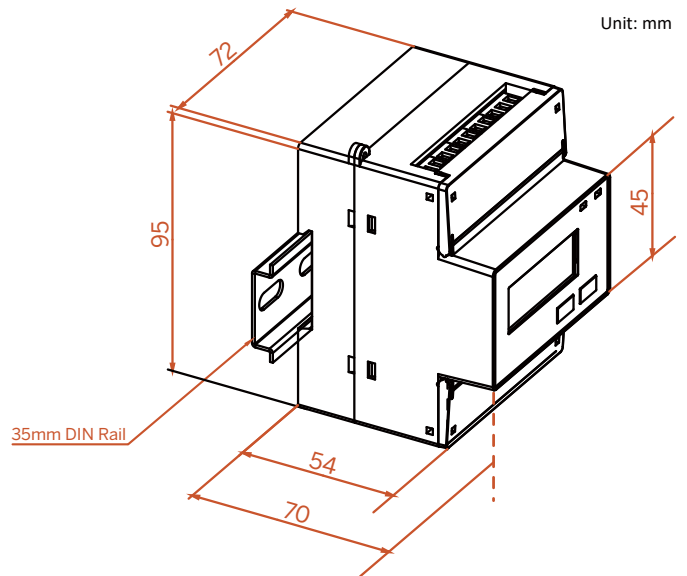

**CT Input Model**

Email: [sales@cet-global.com](mailto:sales@cet-global.com)  
 Website: [www.cet-global.com](http://www.cet-global.com)

Copyright © CET Inc. All rights reserved.

Your Local Representative

V1.0 10.04.2026